

KEN BEDPAN WASHER DISINFECTOR 733

Intelligent Disinfection

- CLEAN, LEAN & GREEN

- ✓ Total disinfection
- ✓ Easy service access
- ✓ Complies with 15883

BWD 733 has been developed for small clinics, hospital and isolation wards, and with its compact design it has a large capacity with a small footprint.

The BWD 733 is easy to operate by touch panel with icons showing all relevant information of the program needed by the operators.

The free standing model that is the perfect choice for a busy ward or the optional versions that can process urine bags or suction bags.


The different bedpan holders are suitable for all types of bedpan. The capacity of BWD 733 is one bedpan and two urinal bottles per cycle.

Most holders will be able to hold various commodes and urine measuring glasses. A special utensils basket is available for washing kidney bowls, wash bassins and other small items.

All data from the BWD 733 are fully exchangeable with common computer systems.



HEALTHCARE

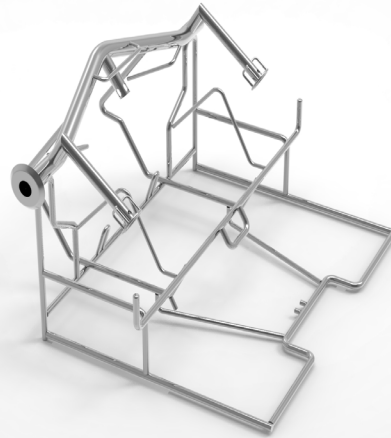

All KEN machines are in conformity with present EU directives, and all hospital machines have been constructed in accordance with EN ISO 15883.

Advantages:

- Low energy costs
- Low noise level
- Low chemical usage

- Easy to use icons
- Quick-start - automatic closing
- Door suitable as slopsink - bedpan emptied automatically

- EN 62366 tested
- EN ISO 15883-1-3-5

- Data are full exchangeable
- Disinfection guarantee

Description	Values
Outer dimensions	H: 1280 x W: 600 x D: 610 mm
Operative chamber dimensions	H: 520 x W: 500 x D: 330 mm
Weight excl./incl. packaging	89 / 107 kg
Built in combitank	10 L
Built in detergent cabinet	2 x 5 L cans
Capacity, bedpan and urinal bottles / bowls /utensil basket	1x2 pcs / 1 pcs / 1 pcs at a time
Bedpan program	Appr. 7
Sealing class	IP 21 (not rinse-proof)
Water connections	2 x 3/4 "
Cold water	200-800kPa, temp. 5-30°C, 0-3° dH
Hot water	200-800kPa, temp. 5-70°C, 0-3° dH
Sound pressure ISO 11204 L	<45 dB (A)
Water consumption per phase	See technical manual
Power supply options	3Nx200/230/240/380/400/415V 50/60Hz E+(N) (Single phase available)
Heating elements in combitank	3x2 kW / 3x3 kW
Programs available	5 standard
Drain	Inner ø90 mm, outer ø110 mm

Contact a KEN partner

Clean, Lean & Green